

A man and a woman in business attire standing in front of a modern glass skyscraper. The man is in the foreground, wearing a white shirt and a dark blazer, looking to the right. The woman is behind him, also in business attire, looking forward. The background is a tall, modern building with a grid of windows, some of which are lit from within. The sky is clear and blue.

Hisense | COMMERCIAL
DISPLAY

LED DISPLAYS

Hisense

INDOOR

HIP SERIES

CORPORATE PERFECTION

Perfect for any corporate environment where space is a premium, the HIP series 16:9 LED wall delivers seamless panel integration and ultra-high brightness. Give your staff and clients the most memorable visual LED experience.

INDOOR LED DISPLAY



HIP SERIES



Die casting aluminum

Die casting aluminum design with easy maintenance, water proof, dustproof & anti-corrosion

Dual power backup

Dual power backup & dual signal input, automatic online switch when failure happens, stable & reliable operation

Balanced Color

Accurate correction & automatic adjustment of color ensures brightness balance and vivid picture.



High refresh rate

With uniform color scale and brightness, dynamic performance of LED display could restore the true scenes without any ripples.



Brightness nits

With an average 500 nits and 1,000 nits maximum brightness, the display panels can deliver amazingly vivid imagery anywhere during daytime and nighttime conditions.



Low brightness & High gray level

LED display could reveal more details, including layers and colors, than traditional displays do.



160° High viewing angle

The extra wide 160° viewing angle is a perfect fit for large groups of people that will view the displays from diverse angles while passing by.



High color calibration

LED display correction technology could uniformly lighten several hundred thousand LED lights, presenting a uniform display effect with the same brightness and color scale.



Self-Heat Dissipation Management

Self-heat dissipation design, energy saving and noise reduction improve the service life

FEATURES

- Less installation Space
- 7000:1 high contrast ratio
- 68.7 billion colors
- High IP level
- 160° high viewing angle
- Nanotechnology
- High uniformity & cost performance
- Ultra-high contrast ratio


INDOOR LED DISPLAY

HIP SERIES SPECIFICATIONS



HIP SERIES			
Pixel Pitch	P0.937	P1.25	P1.56
LED Type	4in1 1616	SMD1010	SMD1212
Thickness	40mm		
Module Size (W×H/mm)	150 x 337.5		
Cabinet Dimension (W×H/mm)	600 x 337.5		
Cabinet Resolution	640x360	480 x 270	384x216
Cabinet Weight (kg/panel)	≤6.5kg		
Brightness (Nits)	500 (0-1000 Adjustable)		
Contrast Ratio	7000:1		
Maintanance	Front Access		
IP Rating	IP50		
Max Power Consumption (W/sqm)	≤650		
Avg Power Consumption (W/sqm)	≤150		
Viewing Angle	160°		
Refresh Rate (Hz)	3840		
Operating Enviroment	From -10° to 40°		
Life Span	≥100,000 Hours		

DIMENSIONS

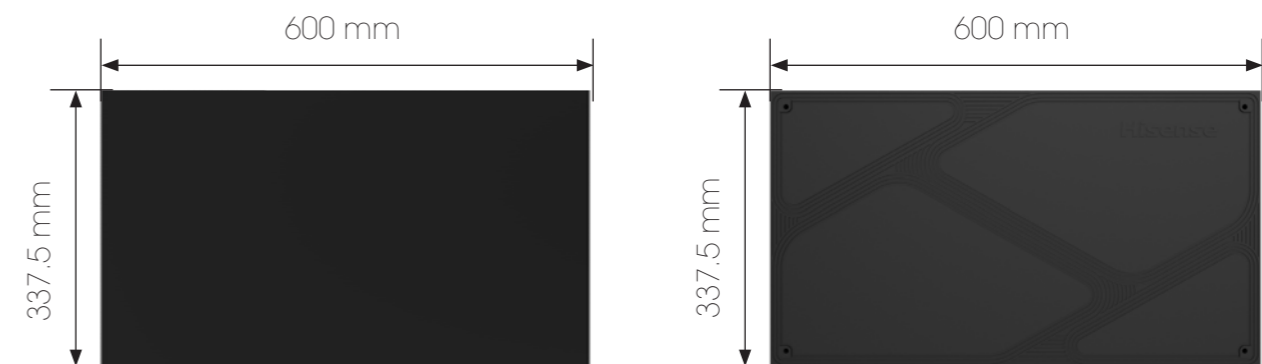



Hisense Commercial Display
Email: sales@hisense-b2b.com
Web: www.hisense-b2b.com

Hisense