



RBM-1060LQB

Qbic's TD-1060 Slim space management system is the perfect complement to any workplace, retail, or professional location requiring a top-tier solution with a minimal footprint.

Digital Signage | Room Booking System | POS | Interactive Platform






Meeting Room Scheduling

Compatible with major scheduling platforms.

 Exchange  Outlook  Office 365  Suite  Gmail

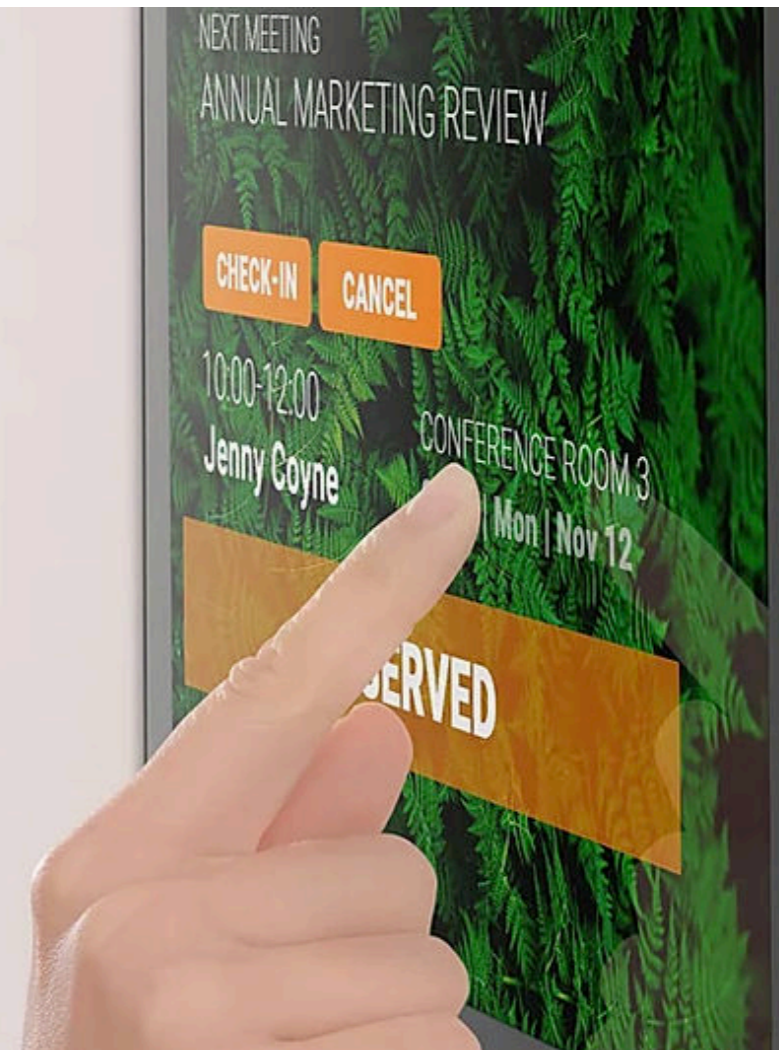


Works in various settings

The TD-1060 Slim is versatile with the options of mounting the device on just about any surface. Additionally, with the option of a multi-angle counter-top stand, the TD-1060 Slim offers users the freedom of integrating the smart panel-PC to any scenario. From Room booking, Concierge, Signage, HMI to central control system.



Programmable LED lights

The TD-1060 Slim is equipped with a vibrant programmable LED light bar. The true color spectrum lets you decide what colors to use and define your own status representation.

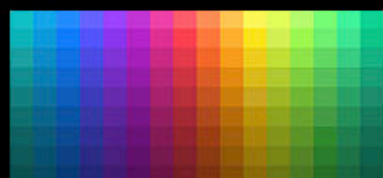

True color spectrum





Stereo Speakers

Embedded with internal dual 2W stereo speakers making the TD-1060 Slim the perfect panel-pc for playing media's, broadcasting announcements or ambient music.



PoE+ (Power over Ethernet)
Single cable; clean installation.
IEEE 802.3at standard.


Discrete Cable Outlets

The TD-1060 Slim is designed for landscape or portrait installation with a well thought of cable management.



Mount to Glass

A damage free surface mount allows a clean installation on glass surfaces that leaves no scratches or damages to the mounting surface.

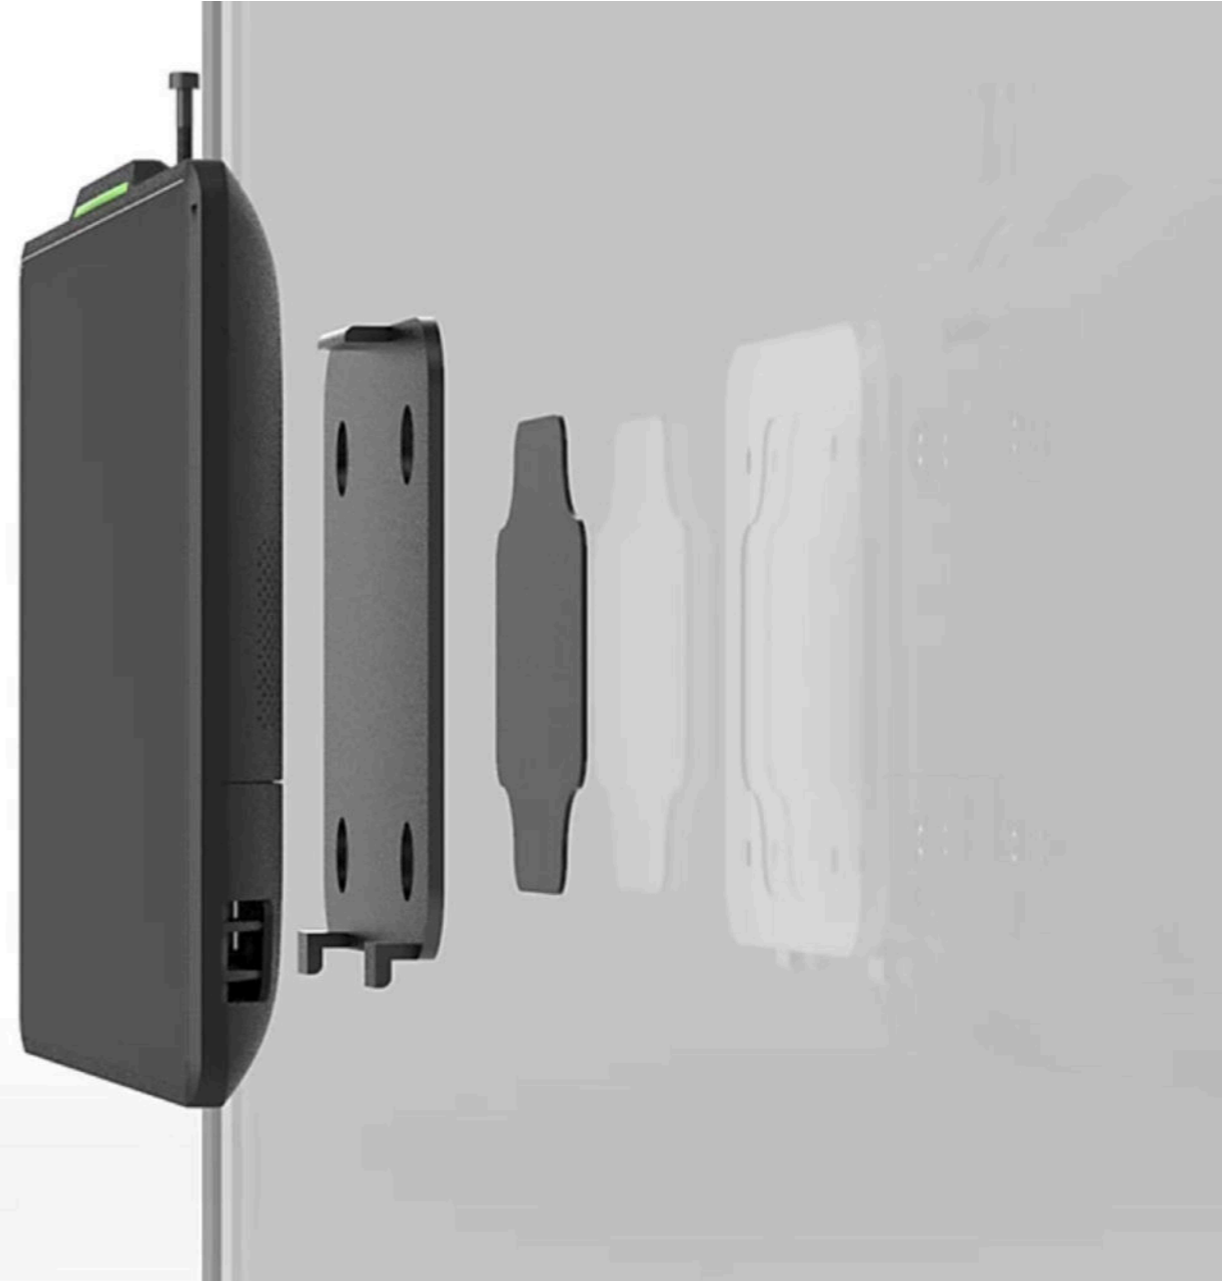





Rich I/O Ports

A rich array of under-exposed I/O ports allow a diverse range of connectivity.

Durable IPS Multi-touch Screen

Supports 10 point multi-touch with Active Shielding technology that ensures accurate contact even with wet fingers.

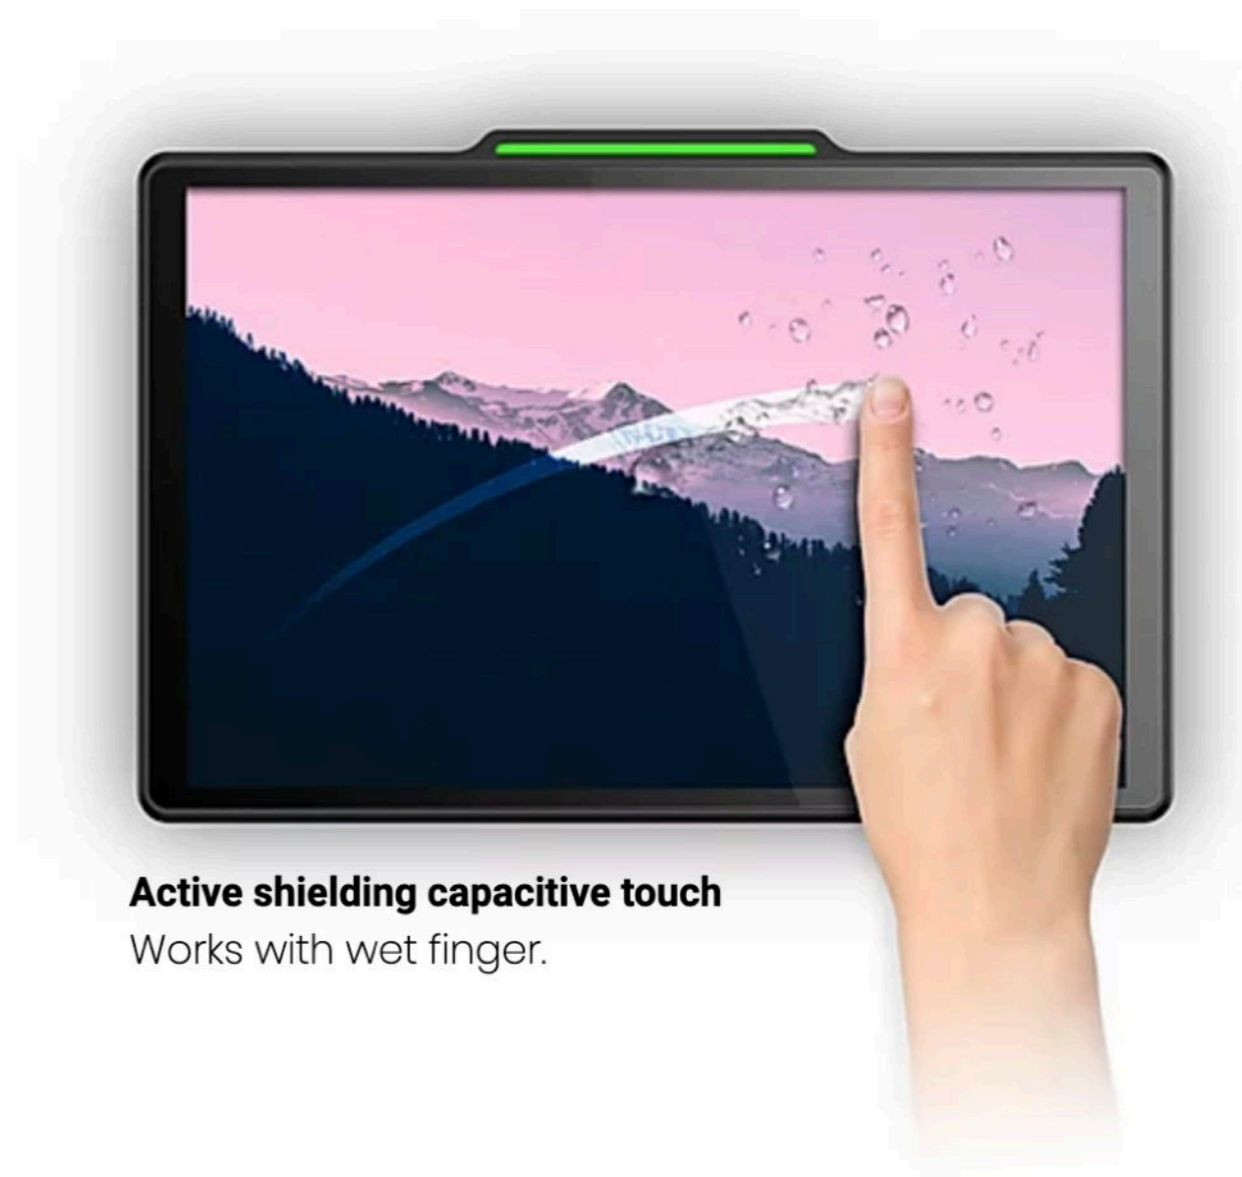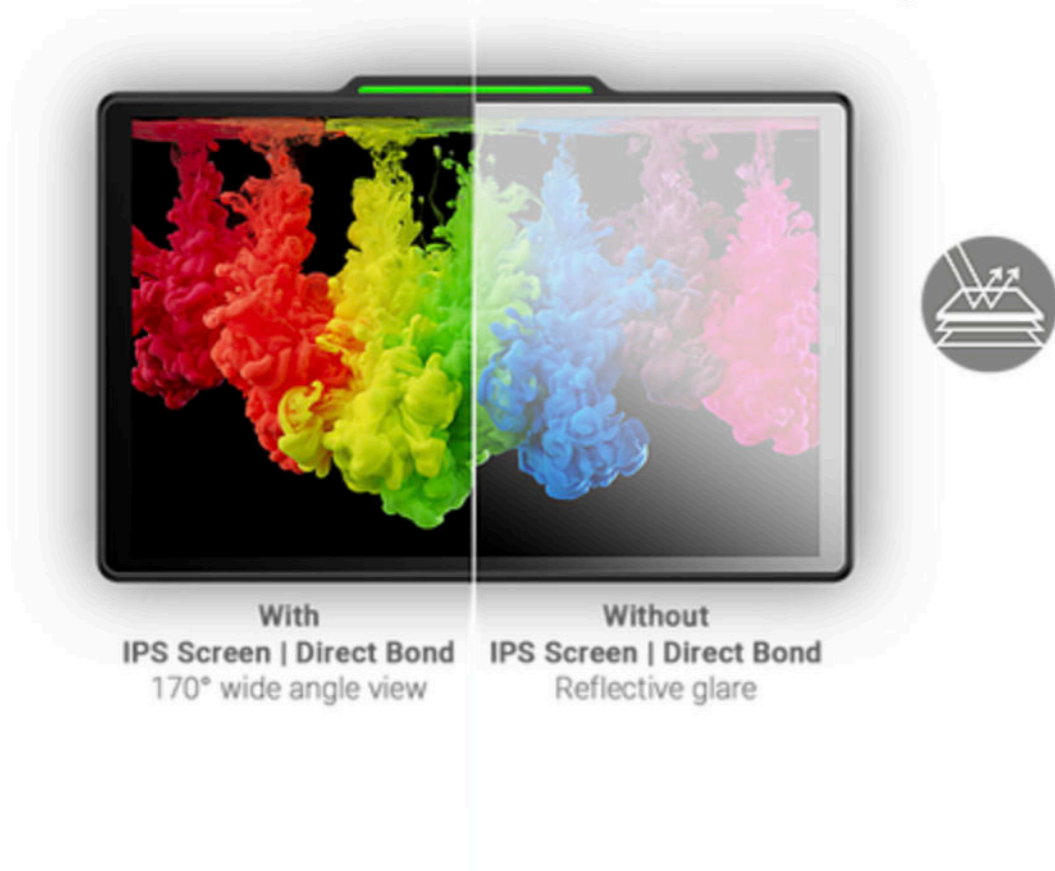

Active shielding capacitive touch
Works with wet finger.



Safe & Secure

Armed with Qbic's hardened OS features, the TD-1060 Slim is free from malware, security breach and data leaks.

- Routine security patch updates.
- 802.1x protocol.
- Physical I/O lock feature.



Specification

Model	TD-1060 Slim
Features	
Programming API	HTML5 / SMIL / Android API
PoE+	Yes
Beacon (BLE)	Option
Light bar	Front LED
System	
OS	Android 8.1
CPU	ARM Quad-core 1.5GHz (64 bit)
Memory	2GB DDR3L
Storage	16GB eMMC
Video decoder	H.264 / H.265,VC-1, MPEG-4, VP8
Image codecs	JPEG/BMP/GIF/PNG
Audio codecs	MPEG/OGG/ACC
Media	
Speaker	2W x 2
Display	
Size (inch)	10.1"
Display Resolution	1280 x 800 (16:10)
Brightness	350 nits
Contrast ratio	1000:1
Touch	Yes (Multi-touch)
Viewing angle (H/V)	170° / 170°
Orientation display	Landscape / Portrait

I/O Interface (External)	
Ethernet	1 x RJ45 (10M/100M)
DC Input	Yes
USB 2.0	2 x USB2.0 type A
Audio out / microphone combo jack	1 x 3.5mm stereo (TRRS Type OMTP)
ADB	1 x Micro USB (ADB)
Storage Expansion	1 x Micro SDHC slot (Support up to 128GB)
Reset Button	Yes
Power Button	Yes
Connectivity	
WLAN	Opt.: WLAN 802.11b/g/n/ac, 2.4 GHz/5GHz
Power	
Input Voltage (V)	DC 12V
Mechanical	
Dimension (WxDxH) (mm / inch)	248 x 166 x 20.8mm (9.76"x6.54"x0.82")
Net. Weight (Gm / Lb)	615g / 1.375lbs
Mounting type	Glass / Surface
Material	Plastic
Environment	
Operating Temperature (°C /°F)	Operating Temp. 0~50°C (32°F to 122°F)
Storage Temperature (package included) (°C /°F)	Storage Temp. -20°C to 70°C (-4°F to 158°F)
Ambient Relative Humidity	Humidity: 10% to 90% (non-condensing)
Certification & Safety	
Certification	CE / FCC / BSMI / NCC / IMDA / RoHS
Warranty	
Warranty Period	1 yr
Accessory	
Adapter	Option: DC 12V, 1.5A AC-00M(EN) / AC-00N(UK) / AC-00O(US) / AC-00G(SG)
Bracket Kit	Option: AC-140 (Screws*1, Bracket*1, Tape*1)
IO Cover	Yes
Screw	Yes
QSG	Yes



Main Office

Viale Lombardia, 51/53
20861 Brugherio (MB) Italy

Registered Office

Viale Certosa, 223
20151 Milan (MI) Italy

Contacts

Phone: +39.039.28.72.429
Email: enquiry@avstore.tv

Social

 www.facebook.com/AVstore.tv
 www.twitter.com/@AVstore_tv

AVstore is a trademark of Voome Networks S.r.l.

shop.avstore.tv

